


Fisa tehnica Profile tip AS

Material: Besaflex (pvc plastifiat, cu rezistenta mare la fortele de structura impuse, la solutiile acide si alcaline, descompunerilor cat si tuturor agentilor naturali. Recomandat pentru presiuni normale ale apei.)

Dimensiuni:

Tip	a	b	c	f
AS 100	100	50	3,0	10
AS 120	120	60	3,0	10
AS 150	150	60	3,0	10
AS 200	200	70	3,5	15
AS 240	240	80	3,5	15
AS 320	320	100	4,5	15

cu armatura bara otel externa

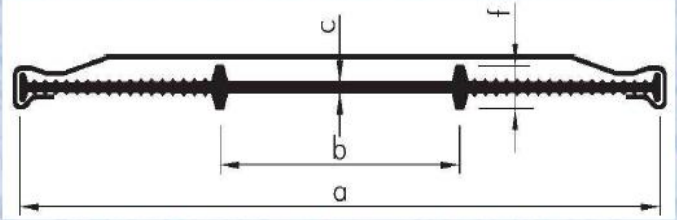

The technical drawing shows a cross-section of the AS profile. It is a long, thin, rectangular profile with a central longitudinal slot. The profile has a slightly wider top and bottom edge. The dimensions are labeled as follows: 'a' is the total width of the profile; 'b' is the width of the central longitudinal slot; 'c' is the thickness of the profile; and 'f' is the height of the profile. The drawing also shows the profile's ends, which are slightly rounded and have a small protrusion.